

RIFAY CABLE STRIPPING MACHINES (RCS SERIES) PEEL OFF WASTE AND EXPIRED CABLE TYPES AND REMOVE THE COPPER WIRES INSIDE.

OUR MACHINE, WHICH CAN ROTATE 55 RPM PER MINUTE AS STANDARD, CAN PEEL 25-30 METERS OF CABLE PER MINUTE (**MAY VARY ACCORDING TO THE USER).

RCS SERIES ARE MADE WITH ST37 MATERIAL QUALITY AND IT IS ONE OF THE MOST PERFORMANCE MACHINES YOU CAN USE TO STRIP YOUR CABLES.

OUR MACHINE, WHICH IS EASY TO OPERATE AND TRANSPORT, CAN BE OPERATED VERY EASILY WITH SWITCHES.



MODEL	LENGTH	WIDTH	ALTITUDE	WEIGHT	CUTTING SPEED	CUTTING DIAMETER	KNIFE MATERIAL	POWER UNIT
RCS-23	140	65	132	470 Kgs.	25-30 mt/min.	Ø2-Ø120	Q1050	3kw/ 55 rpm

MACHINE TECHNICAL DETAILS

IT CAN PEEL, CRUSH AND SMASH ALL KINDS OF CABLES WITH Ø2-Ø120 SPECIFICATIONS. (THREE-CORE, FOUR-CORE, SHEATHED WIRE, SINGLE FILAMENT COPPER WIRE, MULTI-WIRE WIRES, ALUMINIUM CABLES ETC.

COMPATIBLE WITH MANY WIRE DIAMETERS, IT IS A SIMPLE MACHINE TO USE AND OPERATE

THE BLADES ARE ASSEMBLED SEPARATELY AND HAVE COST-FRIENDLY EQUIPMENT IN CASE OF ANY REPLACEMENT OR REPAIR.

VIBRATION IS MINIMIZED WITH THE IMMERSION GEARBOX PHILOSOPHY.

THERE ARE A TOTAL OF 16 HOLES IN THE MACHINE, INCLUDING 12 ROUND WIRE HOLES AND 4 CABLE CRUSHING ENTRANCE HOLES.

SCRAP TYPE USE IS AN IDEAL MACHINE FOR INDUSTRIAL TYPE USE



RIFAY HYDRAULIC GRABS (RHG SERIES) ARE MACHINES THAT YOU CAN USE TO MOVE MATERIALS FROM ONE LOCATION, TO SHRED THEM.

HYDRAULIC GRABS ARE USED IN RECYCLING, DEMOLITION, CONSTRUCTION, IRON-STEEL, SCRAP INDUSTRY.

IT OPENS AND CLOSES WITH THE HYDRAULIC SYSTEM, AND ELECTRICAL VERSIONS CAN BE PRODUCED ACCORDING TO YOUR REQUEST.

MAIN AREAS OF USE:

- SEPARATION OF DEMOLITION WASTE AND LOADING AND UNLOADING INTO DAMPERS
- SORTING AND SHREDDING OF SCRAP MATERIALS, MOVING THEM TO DIFFERENT LOCATIONS
- SEPARATION OF RECYCLED MATERIALS FOR PROCESSING
- MATERIAL TRANSPORT AND CLASSIFICATION IN IRON AND STEEL PLANTS AREAS LIKE ARE POPULAR USES.

MACHINE TECHNICAL DETAILS

⌚ THERE ARE DIFFERENT TYPES OF MACHINE MODELS (RHG250-RHG400-RHG500)

NAIL TIP OF THE MACHINES MADE WITH STANDARD HARDOX ADDED


⌚ OUR MACHINES ARE RESISTANT UP TO 250 BAR.

⌚ STANDARD STEEL QUALITY OF THE MACHINES IS ST-52, HARDOX CAN BE ADDED ACCORDING TO CUSTOMER DEMAND

⌚ IT IS INSTALLED ON RIGID CRANES, FIXED BOARD CRANES, CRAWLER EXCAVATORS.

⌚ THE SHAFTS IN THE MACHINE HYDRAULIC CYLINDER ASSEMBLY ARE CHROME PLATED.

⌚ PISTON SET IS PRODUCED FROM PRODUCTS RESISTANT TO HIGH TEMPERATURE AND WORKING PRESSURE.

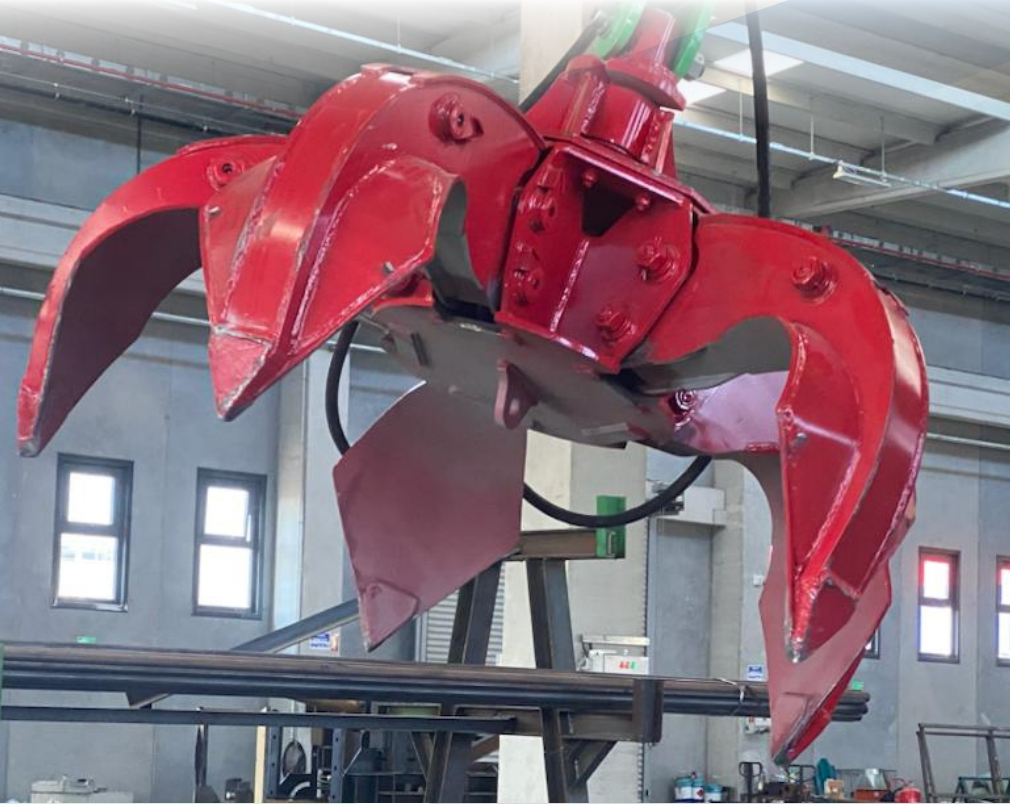

MODEL	WORKING PRESSURE	WEIGHT	CAPACITY	NUMBER OF ARMS
RHG-250	250	350	250 lt.	5
RHG-400	250	600	400 lt.	5
RHG-500	250	700	500 lt.	5
RHG-500	250	700	500 lt.	4

